

LUX M12



KUBOTA Z482 | 2 CYL | 1500 RPM
LIQUID COOLED ENGINE



VERTICAL TELESCOPIC MAST
MAX HEIGHT | 9 m
LIFETIME WARRANTY



RATED OUTPUT | 3.5 kVA - 230V
OUTLET SOCKET | 1.3 kVA - 230V



FUEL CONSUMPTION | 0.55 l/h
RUNNING TIME | 145 h



LED FLOODLIGHTS | 6 X 150 W
ILLUMINATED AREA | 4000 m²



340° MAST ROTATION
ADJUSTABLE FLOODLIGHTS



GALVANIZED METAL BODY
80 µm POWDER COATING

LM SERIES



MADE IN
ITALY



LUXTOWER 
lighting towers

LM Series

LUX M12

TECHNICAL DATA

Rough dimensions & weight

Dimensions min.	mm	2390 X 1380 X 2640
Dimensions max.	mm	2390 X 2370 X 9000
Total weight without fuel	Kg	700

Features

Rotation		340°
Floodlight	W	6 X 150 W
Lamps type		LED
Wind stability	Km/h	80
Optional		Light sensor Main/generator switch Bunded tank


Alternator

Model	Synchronous Linz Alumen	
Frequency	Hz	50
Degree of protection	IP	23
Rated output	kVA/V	3.5 - 230
Outlet socket	kVA	1.3

Engine

Model	Kubota Z482 2 cyl liquid cooled	
Fuel		Diesel
r.p.m.		1500
Noise Level	db at 7 meters	65
Tank capacity	l	80
Running time	h	145
Fuel consumption	l/h	0.55

Illuminated Area // 5 lux min.

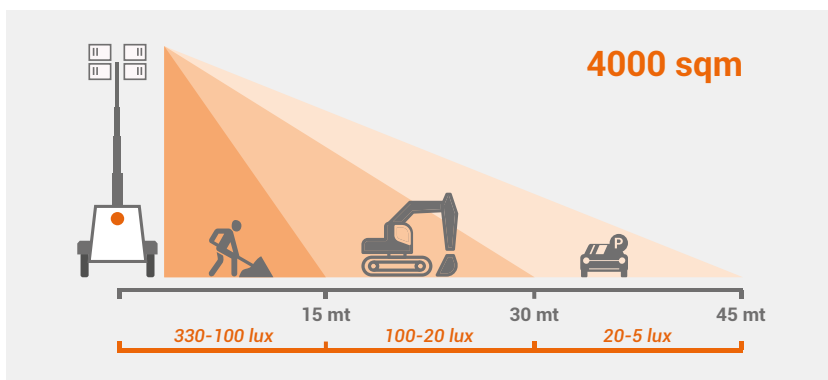

Load Delivery

	16 Units
	6 Units
	Assembled: 10 Units Disassembled: 18 Units